



O K L A H O M A S T A T E U N I V E R S I T Y

SCHOOL OF ELECTRICAL AND COMPUTER ENGINEERING
SCHOOL OF MECHANICAL AND AEROSPACE ENGINEERING



ECEN/MAE 3723 Systems I
Section 002
Fall 2004
Final Exam
December 14, 2004



Choose any four out of five problems.
Please specify which four listed below to be graded:
1) _____; 2) _____; 3) _____; 4) _____;


Name : _____

Student ID: _____


E-Mail Address: _____

Problem 1: Apply the gain formula to the SFG shown below to find the transfer functions of


$$\frac{Y_5}{Y_1} \text{ and } \frac{Y_5}{Y_2}.$$

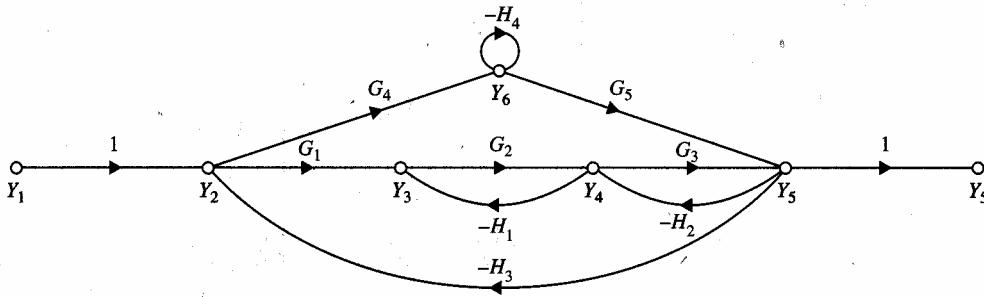

Problem 2: Figure below shows the block diagram of the antenna control system of the solar-collector field. The signal $N(s)$ denotes the wind dust disturbance acted upon the antenna. The feedforward transfer function $G_d(s)$ is used to eliminate the effect of $N(s)$ on the output $Y(s)$. Find the transfer function $Y(s)/N(s)|_{R=0}$. Determine the expression of $G_d(s)$ so that the effect of $N(s)$ is entirely eliminated.

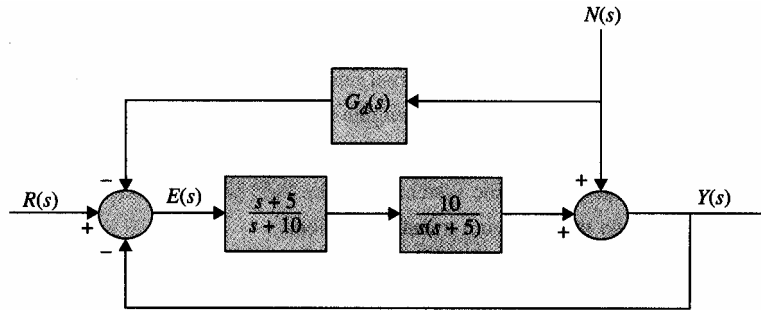


Problem 3: Find the range of K in $G(s)$ for which the G-configuration equivalent system shown below is stable.



in which
$$G(s) = \frac{K}{s^4 + 6s^3 + 13s^2 + 12s + 4}.$$

Problem 4: Consider the mechanical system shown below. Using the force-current analogy to derive an *analogous* electrical circuit. Show the resulting circuit diagram.

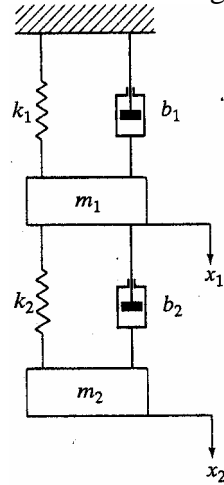

Problem 5: For the circuit shown below, find the transfer function defined below

$$H_2(s) = \frac{I_2(s)}{V_1(s)}$$

